


# DUAL 10.4" RACK MOUNT MONITOR

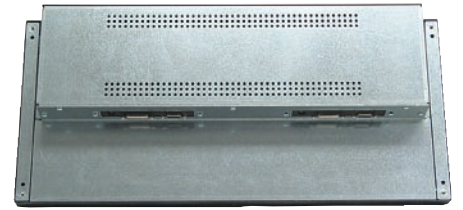

- Dual 10.4" TFT LCD display (1024 x 768 resolution) in 5U (8.75") of rack space.
- Both monitors feature ARGB (Analog RGB) and DVI-D signal inputs.
- Housed in rugged steel construction with a black powder coat finish.
- Supplied with VGA cables, AC/DC adapter and power cord.
- Available composite video inputs via RCA and S-Video connectors (V).
- Available Lexan™ screen protection (L).
- Energy saving LED back lights.

## GENERAL SPECIFICATIONS

### Dimensions:

19.0" (W) x 8.75" (H) x 2.35" (D)  
(1.65" (D) behind rack mounting rails).

### Weight:

12 lbs

### Power:

110 - 240 VAC, 50/60 Hz.  
60 Watts max.

### On-Screen Controls:

Brightness, Contrast, Horizontal & Vertical  
Position, Auto Adjust, OSD H & V Position, Input Select  
Color Temp., Reset.

### Plug & Play:

DDC1 and DDC2B

### Temperature:

Operating: 0°C to 50°C  
Storage: -20°C to 60°C

### Humidity:

Operating: 10 to 90% RH (max)

### Input Signal (VGA):

R.G.B. analog video, TTL H & V sync.

### Input Signal (Digital):

DVI-D (TDMS).

### Input Signal (Composite):

RCA and S-Video inputs available.

### Input Connectors:

Analog: 15-pin mini D-Sub.  
Digital: 24 pin DVI-D.

### Colors Available:

Black.

Specifications subject to change without notice.

## DISPLAY SPECIFICATIONS (APPLY TO EACH DISPLAY)

### Display Type:

Active matrix TFT LCD

### Display area:

10.4" Diagonal.

### Colors Displayed:

16.2M colors.

### Contrast Ratio:

1200:1 typ.

### Brightness:

500 cd/m<sup>2</sup> typ.

### Viewing Angle:

Horizontal: 176°  
Vertical: 176°

### Response Time:

25ms Typ.

### Resolution:

VGA up to 1024 x 768.

### Horizontal Frequency:

31.5 to 80KHz.

### Vertical Frequency:

56 to 75 Hz.

### Backlight:


LED BLU

50,000 POH MTBF

### Screen Protection:

Lexan™ available.

## LTRM-102N(X)(X)

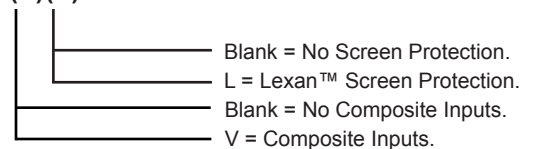

We offer OEM and custom solutions.  
Contact us for additional information.

**1-800-660-2286**

**LAN TEK**

www.lantekrackmount.com

lantek@earthlink.net

P. O. Box 549  
Yucca Valley, CA 92286

Tel: 760-364-2900  
Fax: 760-364-4997